

R48-500

DC Power
for Business-Critical Continuity™

Rectifier -48VDC, 500W

Features and Benefits

- Low rectifier/subrack height minimize space needed for power in embedded applications
- DSP (Digital Signaling Processor) means fewer components, optimized operation and active load sharing for increased reliability
- Compliant with global standards delivers quality, performance and reliability no matter what the application or location demands
- High efficiency, Maximum 91% efficiency reduces power consumption for lower operating costs
- Hot pluggable facilitates future extensions
- Wide input voltage range operates in the most demanding environments where input voltage changes
- Wide temperature operating range (-40°C / -40 °F to +75°C / 167°F) meets the harshest climatic environment requirements

Description

The R48-500 rectifier converts standard AC supply voltages into stable nominal -48 VDC voltages adjustable to the needs of the application. The R48-500 is a constant power rectifier designed with the latest patented switch-mode technology using DSP (Digital Signaling Processor) functionality for efficient operation. For a larger load capacity, rectifiers can be connected in parallel and intelligent control can be added with the help of a separate controller.



R48-500

Technical Specifications, R48-500

AC Input

Input Voltage, Nominal	100 to 250 V AC
Input Voltage, Permitted Variation	85 to 300 V AC
Line Frequency	45 to 65 Hz
Max Input Current	6.8 A
Power Factor	0.99
THD (Total Harmonic Distortion)	≤5% for 50%-100% load

DC Output

Output Voltage, Adjustment Range	-42 to -58 V DC
Output Power	500W@Vout >48VDC
Output Power, Derated for Input Voltage	See Diagram
Output Current	10.5 A @ -48 VDC
Efficiency	91%
Psophometric Noise (System)	≤1mV ; <32 dBrc
Temperature Derating	See Diagram

Control and Monitoring

Rectifier Alarm and Signaling	Alarm and status reported via CAN bus to system controller
Visual Indications	Green LED: Normal Operation Yellow LED: Alarm Red LED: Failure Flashing Red LED: Fan Failure

Environmental

Temperature Range, Operating	-40 to +75°C, -40 to +167°F
Temperature Range, Storage	-40 to +75°C, -40 to +167°F
Relative Humidity	0 to 95%
Altitude	2000 m, 6560 ft at full power
EMC	ETSI EN 300 386 class B, FCC CFR 47 Part 15 class B, Telcordia GR-1089-CORE class B
Safety	IEC 60950, EN 60950, UL 60950

Mechanics



Dimensions (H×W×D)	40.8 × 86.5 × 241mm (1.6 × 3.4 × 9.5 inches)
Weight	1.25 kg (2.76 lbs)

Other parts

Controller Units	See separate ACU+ and SCU+ datasheets
------------------	---------------------------------------

Ordering information

Product Name	Rectifier R48-500
--------------	-------------------

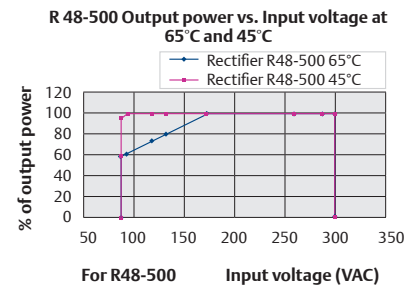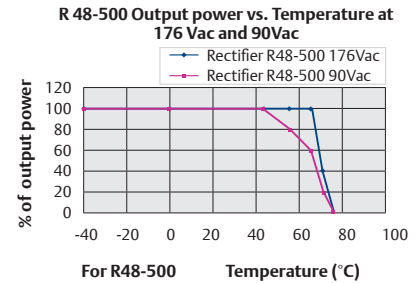

Emerson Network Power.
The global leader in enabling
Business-Critical Continuity™

- AC Power
- Connectivity
- DC Power
- Embedded Computing

- Embedded Power
- Monitoring
- Outside Plant
- Power Switching & Controls

- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

www.emersonnetworkpower.com
www.emersonnetworkpower.com/energysystems
www.DCpowerefficiency.com

Business-Critical Continuity, Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2009 Emerson Electric Co.